

ZyXEL WEEE 3R REPORT

ZyXEL WEEE program – Evaluation of Recyclability and Recoverability rate for ZyXEL Networked equipment EU Directive 2012/19/EU

Company name.....	: ZyXEL Communications Corporation
Address	: No. 2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C.
Department.....	: Quality Management Department
Report No.....	: ZQ20130220003
Version.....	: 1.0
Issue date.....	: 2013-04-29
Reporting period.....	: 2013-03-22 to 2013-04-29
Product category.....	: IT and Telecommunications equipment
Test Object	: 500 Mbps Mini Powerline Pass-Thru Ethernet Adaptor
Model name	: PLA4211
P/N no.	: PLA4211-EU0101F
Trademark.....	: 
Power supply (I/O)	:
Rating(s)	: I/P:AC 100-240V, 50/60Hz, 0.1A (Excluding output loading). AC 100-240V, 50/60Hz, 16A (Including output loading) O/P:AC 100-240V, 50/60Hz, 16A
Standard	: ZyXEL WEEE program is based on following: Directive 2012/19/EU (WEEE Recast) A guide to the marketing, product development and manufacturing actions you need to take (DTI & Defra)
Test Report Form No.....	: ZyXEL TRF52001_2013-02-06 / Ver. 1
Number of pages (Contents).....	: 11 pages
Number of pages (Attachments)..	: 3 pages
Reported by....	: Ted Jao
Approved by..	: Emma Bao

INDEX

1. ABBREVIATIONS USED IN THE REPORT	3
2. GENERAL DESCRIPTION OF PRODUCT	4
3. DISASSEMBLING INFORMATION	6
4. CALCULATION RESULT	9

ATTACHMENT

ATTACHMENT A : PLASTIC MATERIALS MARKING	12
ATTACHMENT B : IDENTIFIED FOR SELECTIVE TREATMENT	13
ATTACHMENT C : REGISTRATION RESPONSIBILITY	14

1. Abbreviations used in the report


Abbr.	Full name
QMD	Quality Management Department
3R	Reused, Recycle, Recovery
MB	MotherBoard
PSU	Power supply unit
$M_{(i)}$	Mass of ith part (ref.: IEC/TR 62635:2012)
$RCR_{(i)}$	Recycling rate of the ith part in the corresponding end-of-life treatment scenario (ref.: IEC/TR 62635:2012)
$RVR_{(i)}$	Recovery rate of the ith part in the corresponding end-of-life treatment scenario (ref.: IEC/TR 62635:2012)
m_{EEE}	Total product mass (ref.: IEC/TR 62635:2012)
Recyclability	Ability of waste product to be recycled, based on actual practices
Recoverability	Ability of a waste product to be recovered, based on actual practices
EoL	End-of-life

2. General description of Product

Picture of Product:



Copy of Marking plate:

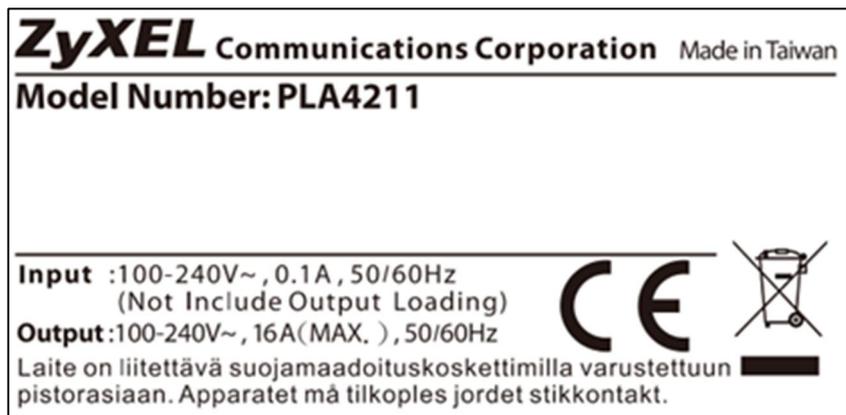

Characteristic data:

Product total weight : 210.4g
Product dimension : L:102mm * W:64mm * H:39mm
IP Level : IPX0

Normative reference:

Directive 2012/19/EU

IEC/TR 62635:2012, Ed.1

ISO 11469:2000 Plastics — Generic identification and marking of plastics products

ISO 1043 Plastics — Generic identification and marking of plastics products

Part 1: Basic polymers and their special characteristics

Part 2: Fillers and reinforcing materials

Part 3: Plasticizers

Part 4: Flame retardants

General Remarks:

"(see remark #) refers to a remark appended to the report.

" (see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of ZyXEL Communication Corporation.

3. Disassembling information

3.1 Disassembling object:

Device		
		
Accessories & Assemblies		
RJ45 Cable		
		

3.2 Derivation tree of Product

- Device



- Enclosure



- Top case x 1
- Bottom case x 1
- Socket x 1
- Screw x 5

- Enclosure assemblies



- Plug x 1
- Down panel x 1
- Up panel x 1
- Up cover x 1
- Down cover x 1
- Shield x 1
- AC_Ping x 1
- Socket shrapnel x 2
- Fire line shrapnel x 2
- Horn shrapnel x 1
- Long bearing x 1
- Spring x 2
- Screw x 1
- Rivet x 4

- PCBA (MB)



- PCBA x 1
- ETH connector x 1
- RJ45 socket x 1

-
- PCBA (Networked)



- PCBA x 1
- Mylar sheet x 1

-
- PCBA (PSU)



- PCBA x1
- Stud x 1
- Screw column cap x 1
- Screw x 1

-
- Accessory

- RJ45 cable x 1



4. Calculation result

Basic information:

Brand name	ZyXEL	Recycling scenario	IT & telecommunication
Model name	PLA4211	Product total weight	210.4 g

Calculation information:

EoL info	No	Name of part	Mass (g)	Material	Recyclability mass (g)	Recoverability mass (g)
Reusable parts	—	—	—	—	—	—
Parts for selective treatment	C.1	PCBA (L:58cm * W:48cm)	26.6	PCBA	2.66	23.94
	D.1	PCBA(SIP)/ 電路板(SIP) (L:55mm * W:22mm)	7	PCBA	0.7	6.3
	E.1	PCBA(Filter)/ 電路板(Filter) (L:57mm * W:43mm)	6.6	PCBA	0.66	5.94
	F.1	RJ-45 Cable/ RJ-45 傳輸線	34.4	Power Cable	8.6	30.96
Parts with single recyclable material	A.1	Upper enclosure/ 上蓋	38	PC	34.2	34.2
	A.2	Down enclosure/ 下蓋	22.6	PC	20.34	20.34
	A.3	Socket/ 插座	11.2	PC	10.08	10.08
	A.4	Screw/ 螺絲	3	Stainless steel (Non-magnetic)	2.85	2.85
	B.1	Plug/ 插頭	7.4	PC	6.66	6.66
	B.2	Down panel/ 插座下板	1.6	PC	1.44	1.44
	B.3	Up panel/ 插頭頂蓋	3.8	PC	3.42	3.42
	B.4	Up cover/ 地線上蓋	0.6	PC	0.54	0.54
	B.5	Down cover/ 地線下蓋	0.4	PC	0.36	0.36

EoL info	No	Name of part	Mass (g)	Material	Recyclability mass (g)	Recoverability mass (g)
Parts with single recyclable material	B.6	Shield/ 插座檔片	1.2	PC	1.08	1.08
	B.7	AC_Ping	14.8	PC	13.32	13.32
	B.8	Socket shrapnel/ 插座彈片	6	Stainless steel (Non-magnetic)	5.7	5.7
	B.9	Fire line shrapnel/ 火線彈片	3.6	Stainless steel (Non-magnetic)	3.42	3.42
	B.10	Horn shrapnel/ 牛角彈片	3.4	Stainless steel (Non-magnetic)	3.23	3.23
	B.11	Long bearing/ 長圓柱	2.4	Stainless steel (Non-magnetic)	2.28	2.28
	B.12	Spring/ 彈簧	0.2	Stainless steel (Non-magnetic)	0.19	0.19
	B.13	Screw/ 螺絲	0.1	Stainless steel (Non-magnetic)	0.095	0.095
	B.14	Rivet/ 鉚釘	0.8	Copper	0.784	0.784
	D.2	Mylar sheet/ 隔離片 (L:26mm * W:30mm)	0.2	PP (Polypropylene)	0.18	0.18
	E.2	Power inductor-coil 功率電感-線圈	16.34	Stainless steel (Non-magnetic)	15.523	15.523
	E.3	Power inductor-core 功率電感-鐵心	4.46	Stainless steel (Non-magnetic)	4.237	4.237

EoL info	No	Name of part	Mass (g)	Material	Recyclability mass (g)	Recoverability mass (g)
Parts difficult to process	—	—	—	—	—	—
Separation Process	C.2	ETH connector 接頭 (L:20.5mm * :15.3mm)	3.6	PA (Polyamide)	2.52	3.24
Sum					$\Sigma(m_{(i)} \times RCR_{(i)}) = 145.069$	$\Sigma(m_{(i)} \times RVR_{(i)}) = 200.309$
Recyclability rate			$\frac{\Sigma(m_{(i)} \times RCR_{(i)})}{m_{EEE}} \times 100\% = 68.9\%$			
Recoverability rate			$\frac{\Sigma(m_{(i)} \times RVR_{(i)})}{m_{EEE}} \times 100\% = 95.2\%$			

ATTACHMENT A
PLASTIC MATERIALS MARKING



The main material of enclosure is PC material.

ATTACHMENT B IDENTIFIED FOR SELECTIVE TREATMENT

In the light of Annex VII on the Directive 2012/19/EU (so called as WEEE recast), selective treatment for materials and components have been defined for further specifically treatment during the end-of-life electrical and electronic equipment, which are:

No	details
1	polychlorinated biphenyls (PCB) containing capacitors in accordance with Council Directive 96/59/EC of 16 September 1996 on the disposal of polychlorinated biphenyls and polychlorinated terphenyls (PCB/PCT) (1),
2	mercury containing components, such as switches or backlighting lamps,
3	batteries,
4	printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimetres,
5	toner cartridges, liquid and paste, as well as colour toner,
6	plastic containing brominated flame retardants,
7	asbestos waste and components which contain asbestos,
8	cathode ray tubes,
9	chlorofluorocarbons (CFC), hydrochlorofluorocarbons (HCFC) or hydrofluorocarbons (HFC), hydrocarbons (HC),
10	gas discharge lamps,
11	liquid crystal displays (together with their casing where appropriate) of a surface greater than 100 square centimetres and all those back-lighted with gas discharge lamps,
12	external electric cables,
13	components containing refractory ceramic fibres as described in Commission Directive 97/69/EC of 5 December 1997 adapting to technical progress for the 23rd time Council Directive 67/548/EEC on the approximation of the laws, regulations and administrative provisions relating to the classification, packaging and labelling of dangerous substances (2),
14	components containing radioactive substances with the exception of components that are below the exemption thresholds set in Article 3 of and Annex I to Council Directive 96/29/Euratom of 13 May 1996 laying down basic safety standards for the protection of the health of workers and the general public against the dangers arising from ionizing radiation (3),
15	electrolyte capacitors containing substances of concern (height > 25 mm, diameter > 25 mm or proportionately similar volume).
Remark: These substances, mixtures and components shall be disposed of or recovered in compliance with Directive 2008/98/EC.	

ATTACHMENT C REGISTRATION RESPONSIBILITY

According to Art. 12 & Art. 13 on the financing in respect of WEEE from private households and non-private households. Recycling fees cover costs of collection, transportation, handling, maintenance of recycling ZyXEL network and equipment as well as solvency required in the Decree.

According to Art. 16 of Directive 2012/19/EU “*Registration, information and reporting*”. ZyXEL has completed and fulfilled EU registration responsibility requirement which shall be registered through their authorised representatives, for detail, please refer to the table below.

Coutry	Registration No.	Approved compliance scheme
UK	WEE/CC0067TX (CD01/00100)	Comply Direct Ltd.
DE	71587309	EAR
DK	21229237	DPA-System
...

For other countries registry information, please feel free to contact with ZyXEL Communications Corporation. email to: ZyXEL_Certification@zyxel.com.tw