


ZyXEL WEEE 3R REPORT

ZyXEL WEEE program – Evaluation of Recyclability and Recoverability rate for ZyXEL Networked equipment EU Directive 2012/19/EU

| | |
|---------------------------------|---|
| Company name..... | : ZyXEL Communications Corporation |
| Address | : No. 2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu, Taiwan, R.O.C. |
| Department..... | : Quality Management Department |
| Report No..... | : ZQ20130220001 |
| Version..... | : 1.0 |
| Issue date..... | : 2013-04-29 |
| Reporting period..... | : 2013-03-22 to 2013-04-29 |
| Product category..... | : IT and Telecommunications equipment |
| Test Object | : 48-port GbE Smart Managed Switch with 10GbE Uplink |
| Model name | : XGS1910-48 |
| P/N no. | : XGS1910-48-EU0101F |
| Trademark..... | :  |
| Power supply (I/O) | : Internal power supply |
| Rating(s) | : AC 100-240V, 50/60Hz, 1.1A max. |
| Standard | : ZyXEL WEEE program is based on following: Directive 2012/19/EU (WEEE Recast) A guide to the marketing, product development and manufacturing actions you need to take (DTI & Defra) |
| Test Report Form No. | : ZyXEL TRF52001_2013-02-06 / Ver. 1 |
| Number of pages (Contents)..... | : 11 pages |
| Number of pages (Attachments).. | : 3 pages |
| Reported by...: Ted Jao | Approved by..: Emma Bao |

INDEX

| | |
|--|----------|
| 1. ABBREVIATIONS USED IN THE REPORT | 3 |
| 2. GENERAL DESCRIPTION OF PRODUCT | 4 |
| 3. DISASSEMBLING INFORMATION | 6 |
| 4. CALCULATION RESULT | 9 |

ATTACHMENT

| | |
|---|----|
| ATTACHMENT A : PLASTIC MATERIALS MARKING | 12 |
| ATTACHMENT B : IDENTIFIED FOR SELECTIVE TREATMENT | 13 |
| ATTACHMENT C : REGISTRATION RESPONSIBILITY | 14 |

1. Abbreviations used in the report

| Abbr. | Full name |
|----------------|--|
| QMD | Quality Management Department |
| 3R | Reused, Recycle, Recovery |
| MB | MotherBoard |
| PSU | Power supply unit |
| $M_{(i)}$ | Mass of ith part (ref.: IEC/TR 62635:2012) |
| $RCR_{(i)}$ | Recycling rate of the ith part in the corresponding end-of-life treatment scenario (ref.: IEC/TR 62635:2012) |
| $RVR_{(i)}$ | Recovery rate of the ith part in the corresponding end-of-life treatment scenario (ref.: IEC/TR 62635:2012) |
| m_{EEE} | Total product mass (ref.: IEC/TR 62635:2012) |
| Recyclability | Ability of waste product to be recycled, based on actual practices |
| Recoverability | Ability of a waste product to be recovered, based on actual practices |
| EoL | End-of-life |

2. General description of Product

Picture of Product:



Copy of Marking plate:

| | |
|---|-----------------------|
| ZyXEL Communications Corporation 合勤科技股份有限公司 | Made in China 中國製造 |
| Model Number(機種) : XGS1910-48 產品名稱: 乙太網路交換器 | |
| Serial Number : <input type="text"/> | |
| Ethernet Address : <input type="text"/> | |
| Power Rating (額定電壓) : 100-240V~ 50/60Hz 1.1A max. Power Consumption : 60.5 Watt max. | |
| This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. | |
| Laite on liitettävä suojamaadoituskoettimilla varustettuun pistorasiaan. Apparaten skall anslutas till jordat uttag. | |
| | CM-2 |

Characteristic data:

Product total weight : 3620.5g

Product dimension : L:428mm * W:242mm * H:38mm

IP Level : IPX0

Normative reference:

Directive 2012/19/EU

IEC/TR 62635:2012, Ed.1

ISO 11469:2000 Plastics — Generic identification and marking of plastics products

ISO 1043 Plastics — Generic identification and marking of plastics products

Part 1: Basic polymers and their special characteristics

Part 2: Fillers and reinforcing materials

Part 3: Plasticizers

Part 4: Flame retardants

General Remarks:

"(see remark #) refers to a remark appended to the report.

" (see appended table)" refers to a table appended to the report.

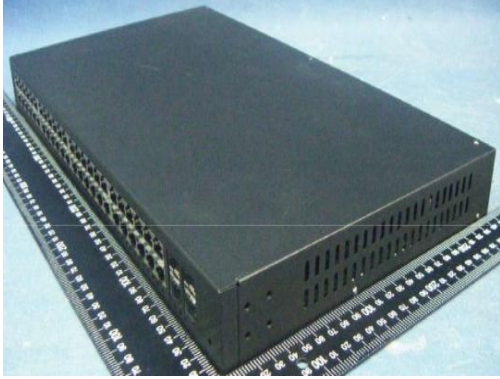

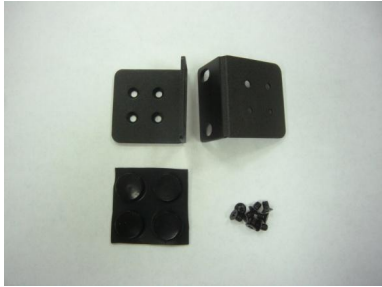
Throughout this report a point is used as the decimal separator.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of ZyXEL Communication Corporation.

3. Disassembling information

3.1 Disassembling object:

| Device | | |
|---|---|--|
|  | | |
| Accessories & Assemblies | | |
| AC Power cord | Anchor assemblies | |
|  |  | |
| | | |
| | | |

3.2 Derivation tree of Product

- Device



- Enclosure



- Top case x 1
- Bottom case x 1
- Screw x 10

- Enclosure assemblies



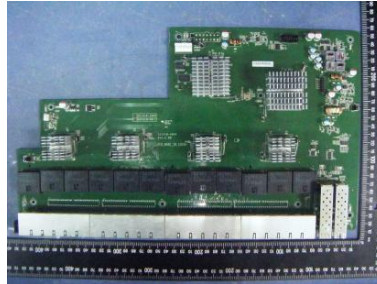
- Screw x 8
- Rackmount ear x 2
- Rubber foot x 4
- Internal power cord x 1
- DC cable x 1

- Fan



- PCBA x 2
- Fan plastic body x 2
- Copper wire x 2
- Motor case x 2
- Axis x 2
- Cable x 2
- Housing x 2
- Screw x 4

- PCBA (MB)



- PCBA x 1
- Heat sink x 10
- SFP cage x 3
- RJ45 jack x 4
- D-SUB connector x 1
- Screw x 8
- Copper wire x 1

- PCBA (PSU)



- PCBA x1
- Heat sink x 2
- Capacitor x 1
- Screw x 8
- Copper wire x 1

- Accessory

- AC power cord x 1



- Power cord x 1
- Plug x 1

4. Calculation result

Basic information:

| | | | |
|------------|------------|----------------------|------------------------|
| Brand name | ZyXEL | Recycling scenario | IT & telecommunication |
| Model name | XGS1910-48 | Product total weight | 3620.5g |

Calculation information:

| EoL info | No | Name of part | Mass (g) | Material | Recyclability mass (g) | Recoverability mass (g) |
|---------------------------------------|-------|--------------------------|----------|-----------------------------------|------------------------|-------------------------|
| Reusable parts | — | — | — | — | — | — |
| Parts for selective treatment | E.1 | AC power cord | 182.4 | Power Cable | 45.6 | 164.16 |
| | B.4.1 | DC cable | 10.2 | Power Cable | 2.55 | 9.18 |
| | B.3.1 | PCBA | 1.2 | PCBA | 0.12 | 1.08 |
| | B.3.5 | Cable | 5.2 | Power Cable | 1.3 | 4.68 |
| | C.14 | PCBA | 628.2 | PCBA | 62.82 | 565.38 |
| | D.1 | PCBA (L120mm*W50.8mm) | 102.1 | PCBA | 10.21 | 91.89 |
| | D.2 | Capacitor (L:31mm) | 13.3 | Capacitor (PCB) | 0 | 0 |
| Parts with single recyclable material | A.1 | Top case | 876 | Stainless steel (Non-magnetic) | 832.2 | 832.2 |
| | A.2 | Base case | 823 | Stainless steel (Non-magnetic) | 781.85 | 781.85 |
| | A.3 | Screw | 2 | Stainless steel (Non-magnetic) | 1.9 | 1.9 |
| | B.1.1 | Rackmount ear | 106.8 | Stainless steel (Non-magnetic) | 101.46 | 101.46 |
| | B.1.3 | Screw | 4.8 | Stainless steel (Non-magnetic) | 4.56 | 4.56 |
| | E.2 | AC terminal | 4.4 | Copper | 4.312 | 4.312 |
| | B.2.2 | Terminal | 3.9 | Copper | 3.822 | 3.822 |
| | B.2.4 | Screw | 0.6 | Stainless steel (Non-magnetic) | 0.57 | 0.57 |

| EoL info | No | Name of part | Mass (g) | Material | Recyclability mass (g) | Recoverability mass (g) |
|---------------------------------------|-------|---|----------|-----------------------------------|------------------------|-------------------------|
| | B.3.2 | Copper wire | 3.6 | Copper | 3.528 | 3.528 |
| | B.3.3 | Motor case | 5.2 | Stainless steel (Non-magnetic) | 4.94 | 4.94 |
| Parts with single recyclable material | B.3.4 | Axis | 8.6 | Stainless steel (Non-magnetic) | 8.17 | 8.17 |
| | B.3.7 | Screw | 4 | Stainless steel (Non-magnetic) | 3.8 | 3.8 |
| | C.1 | Heat sink (L:42.3mm*W:42.3mm*H:30.5mm) | 89 | Aluminum | 84.55 | 84.55 |
| | C.2 | Heat sink (L:26.5mm*W:26.5mm*H:30mm) | 68.4 | Aluminum | 64.98 | 64.98 |
| | C.3 | Heat sink (L:20mm*W:20mm*H:13mm) | 31 | Aluminum | 29.45 | 29.45 |
| | C.4 | SFP cage shield | 37.5 | Copper | 36.75 | 36.75 |
| | C.6 | SFP cage shield | 9.4 | Copper | 9.212 | 9.212 |
| | C.8 | LAN jack shield | 51.6 | Copper | 50.568 | 50.568 |
| | C.10 | D-SUB connector shield | 2.5 | Stainless steel (Non-magnetic) | 2.375 | 2.375 |
| | C.12 | Screw | 4 | Stainless steel (Non-magnetic) | 3.8 | 3.8 |
| | C.13 | Copper wire | 7.3 | Copper | 7.154 | 7.154 |
| | D.3 | Heat sink (L:77mm*W:2.5mm*H:30mm) | 18 | Aluminum | 17.1 | 17.1 |
| | D.4 | Heat sink (L:73mm*W:2.5mm*H:30mm) | 17.8 | Aluminum | 16.91 | 16.91 |
| | D.5 | Screw | 2 | Stainless steel (Non-magnetic) | 1.9 | 1.9 |

| EoL info | No | Name of part | Mass (g) | Material | Recyclability mass (g) | Recoverability mass (g) |
|----------------------------|-------|---|--|-------------------------------------|---|---|
| | D.6 | Screw | 2 | Stainless steel (Non-magnetic) | 1.9 | 1.9 |
| | D.7 | Copper wire | 6.1 | Copper | 5.978 | 5.978 |
| Parts difficult to process | — | — | — | — | — | — |
| Separation Process | B.1.2 | Rubber foot | 5.2 | Rubber (General) | 0 | 4.68 |
| | B.2.1 | AC inlet socket housing | 3.9 | PA (Polyamide) | 2.73 | 3.51 |
| | B.2.3 | Housing | 0.8 | PA (Polyamide) | 0.56 | 0.72 |
| | B.4.2 | Housing | 2.6 | PA (Polyamide) | 1.82 | 2.34 |
| | B.3.8 | Fan enclosure | 35.4 | PBT | 24.78 | 31.86 |
| | B.3.6 | Housing | 0.6 | PA (Polyamide) | 0.42 | 0.54 |
| | C.5 | SFP cage connector LCP(liquid crystal polymer) | 22.8 | PET (Polyethylene Terephthalate) | 15.96 | 20.52 |
| | C.7 | SFP connector | 1.2 | PA (Polyamide) | 0.84 | 1.08 |
| | C.9 | LAN jack connector | 215.2 | PA (Polyamide) | 150.64 | 193.68 |
| | C.11 | D-SUB connector | 3.9 | PA (Polyamide) | 2.73 | 3.51 |
| Sum | | | | | $\Sigma(m_{(i)} \times RCR_{(i)}) = 2410.119$ | $\Sigma(m_{(i)} \times RVR_{(i)}) = 3194.429$ |
| Recyclability rate | | | $\frac{\Sigma(m_{(i)} \times RCR_{(i)})}{m_{EEE}} \times 100\% = 66.6\%$ | | | |
| Recoverability rate | | | $\frac{\Sigma(m_{(i)} \times RVR_{(i)})}{m_{EEE}} \times 100\% = 88.2\%$ | | | |

ATTACHMENT A
PLASTIC MATERIALS MARKING

The equipment of XGS1910-48 enclosure is made by metal which is outside of scope of ISO 11469 as well as ISO 1043 part 1 to part 4 on the requirement of the weight of plastic material equal and/or more than 25g shall be marked.

ATTACHMENT B IDENTIFIED FOR SELECTIVE TREATMENT

In the light of Annex VII on the Directive 2012/19/EU (so called as WEEE recast), selective treatment for materials and components have been defined for further specifically treatment during the end-of-life electrical and electronic equipment, which are:

| No | details |
|--|--|
| 1 | polychlorinated biphenyls (PCB) containing capacitors in accordance with Council Directive 96/59/EC of 16 September 1996 on the disposal of polychlorinated biphenyls and polychlorinated terphenyls (PCB/PCT) (1), |
| 2 | mercury containing components, such as switches or backlighting lamps, |
| 3 | batteries, |
| 4 | printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimetres, |
| 5 | toner cartridges, liquid and paste, as well as colour toner, |
| 6 | plastic containing brominated flame retardants, |
| 7 | asbestos waste and components which contain asbestos, |
| 8 | cathode ray tubes, |
| 9 | chlorofluorocarbons (CFC), hydrochlorofluorocarbons (HCFC) or hydrofluorocarbons (HFC), hydrocarbons (HC), |
| 10 | gas discharge lamps, |
| 11 | liquid crystal displays (together with their casing where appropriate) of a surface greater than 100 square centimetres and all those back-lighted with gas discharge lamps, |
| 12 | external electric cables, |
| 13 | components containing refractory ceramic fibres as described in Commission Directive 97/69/EC of 5 December 1997 adapting to technical progress for the 23rd time Council Directive 67/548/EEC on the approximation of the laws, regulations and administrative provisions relating to the classification, packaging and labelling of dangerous substances (2), |
| 14 | components containing radioactive substances with the exception of components that are below the exemption thresholds set in Article 3 of and Annex I to Council Directive 96/29/Euratom of 13 May 1996 laying down basic safety standards for the protection of the health of workers and the general public against the dangers arising from ionizing radiation (3), |
| 15 | electrolyte capacitors containing substances of concern (height > 25 mm, diameter > 25 mm or proportionately similar volume). |
| Remark: These substances, mixtures and components shall be disposed of or recovered in compliance with Directive 2008/98/EC. | |

ATTACHMENT C REGISTRATION RESPONSIBILITY

According to Art. 12 & Art. 13 on the financing in respect of WEEE from private households and non-private households. Recycling fees cover costs of collection, transportation, handling, maintenance of recycling ZyXEL network and equipment as well as solvency required in the Decree.

According to Art. 16 of Directive 2012/19/EU “*Registration, information and reporting*”. ZyXEL has completed and fulfilled EU registration responsibility requirement which shall be registered through their authorised representatives, for detail, please refer to the table below.

| Coutry | Registration No. | Approved compliance scheme |
|--------|---------------------------|----------------------------|
| UK | WEE/CC0067TX (CD01/00100) | Comply Direct Ltd. |
| DE | 71587309 | EAR |
| DK | 21229237 | DPA-System |
| ... | ... | ... |

For other countries registry information, please feel free to contact with ZyXEL Communications Corporation. email to: ZyXEL_Certification@zyxel.com.tw